

軸流ファン Axial Fan

SEPA

□ 30×30×12mm



PERFORMANCE

产品型号	输入电压 (V)	使用电压 范围(V)	电流(A)		转速 (RPM)	风量		风压		噪音 dBA	Life(h))20°C
			Locked	Moved		CMM	CFM	Pa	mmH2O		
MF30A05	5	4.5~5.5	0.20	0.070	5500	0.05	1.80	13.7	1.40	12	30000
MF30A12	12	10.2~13.8	0.20	0.060	8000	0.070	2.50	28.4	2.90	18	30000
MFB30A05	5	4.5~5.5	0.20	0.070	6500	0.06	2.10	19.6	2.00	18	50000
MFB30A12	12	10.2~13.8	0.20	0.060	9000	0.08	2.80	36.3	3.70	23	50000


※ Operating Temperature (°C) -10 ~ +60

※ Operating Voltage (V) 5V: 4.5 ~ 5.5 12V: 10.2 ~ 13.8

SHAPE&DIMENSIN

Lead Wire AWG 28

风量静压特性 AIR FLOW VS AIR PRESSURE

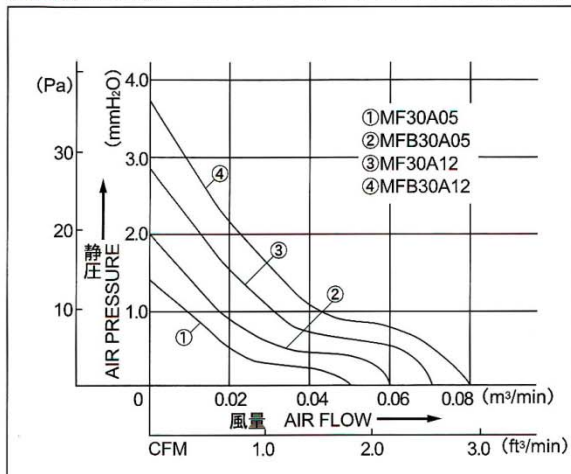

形状及び寸法 SHAPE&DIMENSION

