

# 軸流ファン Axial Fan

# SEPA

□ 30×30×10mm



## PERFORMANCE

产品型号	输入电压 (V)	使用电压 范围(V)	电流(A)		转速 (RPM)	风量		风压		噪音 dBA	Life(h) )20℃
			Locked	Moved		CMM	CFM	Pa	mmH2O		
SF30D05	5	4.5~5.5	0.25	0.130	7000	0.065	2.30	21.6	2.20	15	30000
SF30D12	12	10.2~13.8	0.20	0.060	7200	0.067	2.40	22.5	2.30	15	30000
SFB30D05	5	4.5~5.5	0.25	0.120	7200	0.067	2.40	22.5	2.30	16	50000
SFB30D12	12	10.2~13.8	0.20	0.060	7500	0.069	2.40	24.5	2.50	18	50000
SF30F05	5	4.5~5.5	0.22	0.065	5600	0.052	1.80	13.7	1.40	11	30000
SF30F12	12	10.2~13.8	0.20	0.040	6800	0.063	2.20	20.6	2.10	14	30000
SFB30F05	5	4.5~5.5	0.22	0.060	6300	0.058	2.00	17.6	1.80	13	50000
SFB30F12	12	10.2~13.8	0.20	0.040	7400	0.069	2.40	24.5	2.50	18	50000


※ Operating Temperature (°C) -10 ~ +60

## SHAPE&DIMENSIN

※ Operating Voltage (V) 5V: 4.5 ~ 5.5 12V: 10.2 ~ 13.8

Lead Wire AWG 28

## 风量静压特性 AIR FLOW VS AIR PRESSURE

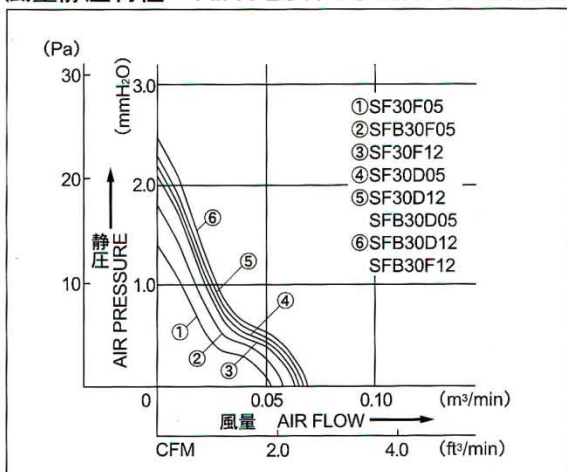

## 形状及び寸法 SHAPE&DIMENSION

