

上方吸込み一方向吹出しヒートシンクファン  
HEAT SINK WITH FAN OF ONE BLOWING EXIT TYPE

□ 35×35×7mm



**PERFORMANCE**

产品型号	输入电压 (V)	使用电压 范围(V)	电流(A)		转速 (RPM)	风量		风压		噪音 dBA	Life(h) )20℃
			Locked	Moved		CMM	CFM	Pa	mmH2O		
HY35E05	5	4.5~5.5	0.26	0.150	6300	0.024	0.80	47	4.80	26	30000
HYB35E05	5	4.5~5.5	0.26	0.150	6500	0.025	0.90	50	5.10	28	30000


※ Operating Temperture (°C) -10 ~ +60

※ Operating Voltage (V) 5V: 4.5 ~ 5.5

**SHAPE&DIMENSIN**

Lead Wire AWG 28

风量静压特性 AIR FLOW VS AIR PRESSURE

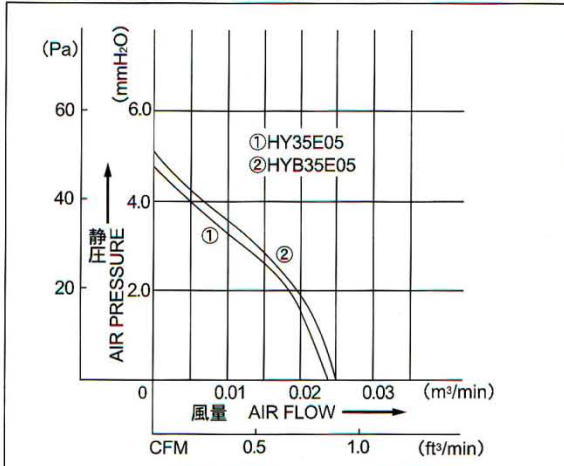

形状及び寸法 SHAPE&DIMENSION

