

□ 50×50×10.5mm

上方向吸込み一方向吹出しヒートシンクファン
HEAT SINK WITH FAN OF ONE BLOWING EXIT TYPE



PERFORMANCE

产品型号	输入电压 (V)	使用电压 范围(V)	电流(A)		转速 (RPM)	风量		风压		噪音 dBA	Life(h))20℃
			Locked	Moved		CMM	CFM	Pa	mmH2O		
HY50C-05	5	4.5~5.5	0.35	0.130	4700	0.08	2.80	78.4	8.00	30	25000


※ Operating Temperature (°C) -10 ~ +60

※ Operating Voltage (V) 5V: 4.5 ~ 5.5

SHAPE&DIMENSIN

Lead Wire AWG 28

风量静压特性 AIR FLOW VS AIR PRESSURE

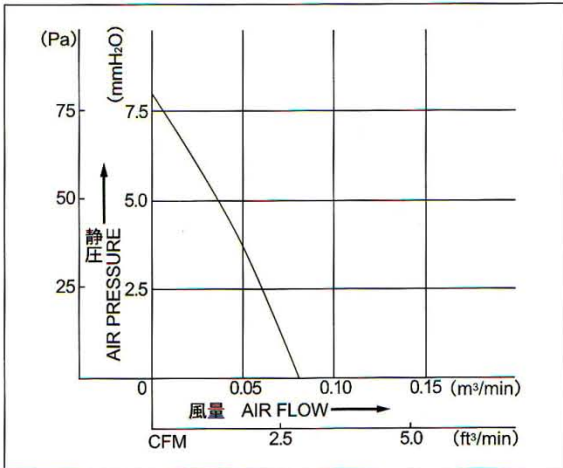

形状及び寸法 SHAPE&DIMENSION

