

# 軸流ファン Axial Fan

# SEPA

□ 20×20×10mm



## PERFORMANCE

产品型号	输入电压 (V)	使用电压 范围(V)	电流(A)		转速 (RPM)	风量		风压		噪音 dBA	Life(h) )20℃
			Locked	Moved		CMM	CFM	Pa	mmH2O		
MFB20A05L	5	4.5~5.5	0.06	0.03	8500	0.011	0.40	10.8	1.1	13	40000
MFB20A05	5	4.5~5.5	0.10	0.04	9000	0.014	0.50	13.6	1.39	14	40000
MFB20A05H	5	4.5~5.5	0.14	0.07	13000	0.020	0.70	27.5	2.81	15	40000


※ Operating Temperature (°C) -10 ~ +60

※ Operating Voltage (V) 5V: 4.5 ~ 5.5

## SHAPE&DIMENSIN

Lead Wire AWG 28

风量静压特性 AIR FLOW VS AIR PRESSURE

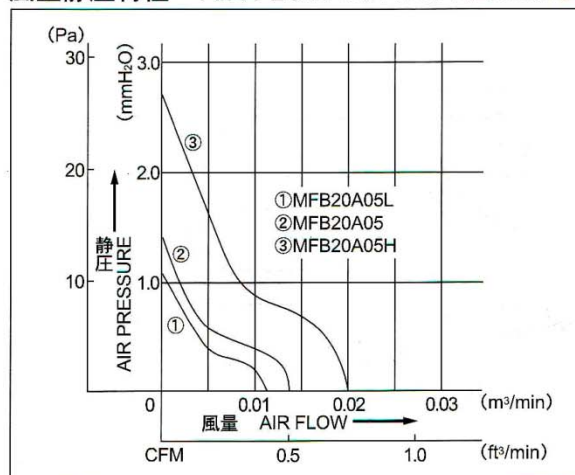

形状及び寸法 SHAPE&DIMENSION

