

軸流ファン Axial Fan

SEPA

□25×25×6.5mm



PERFORMANCE

产品型号	输入电压 (V)	使用电压 范围(V)	电流(A)		转速 (RPM)	风量		风压		噪音 dBA	Life(h))20℃
			Locked	Moved		CMM	CFM	Pa	mmH2O		
MFB25B05L	5	4.5~5.5	0.07	0.036	6700	0.019	0.70	17.7	1.81	11	40000
MFB25B05	5	4.5~5.5	0.10	0.060	10000	0.023	0.80	25.5	2.60	17	40000
MFB25B12	12	10.2~13.8	0.05	0.030	10000	0.023	0.80	25.5	2.60	17	40000


※ Operating Temperature (℃) -10 ~ +60

※ Operating Voltage (V) 5V: 4.5 ~ 5.5 12V: 10.2 ~ 13.8

SHAPE&DIMENSIN

Lead Wire AWG 28

風量静圧特性 AIR FLOW VS AIR PRESSURE

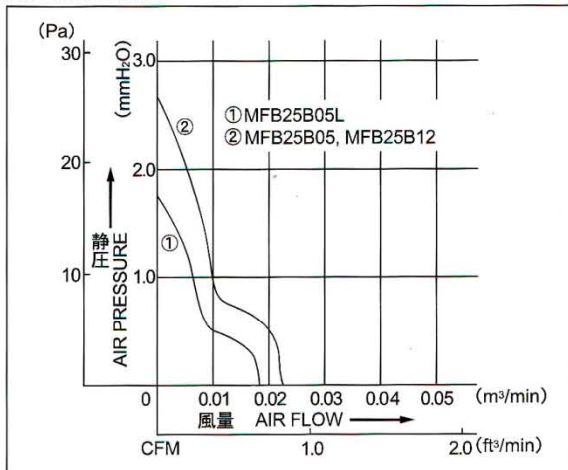

形状及び寸法 SHAPE&DIMENSION

