


交流双进口离心风机

AC centrifugal blower dual inlet, ϕ 133-190

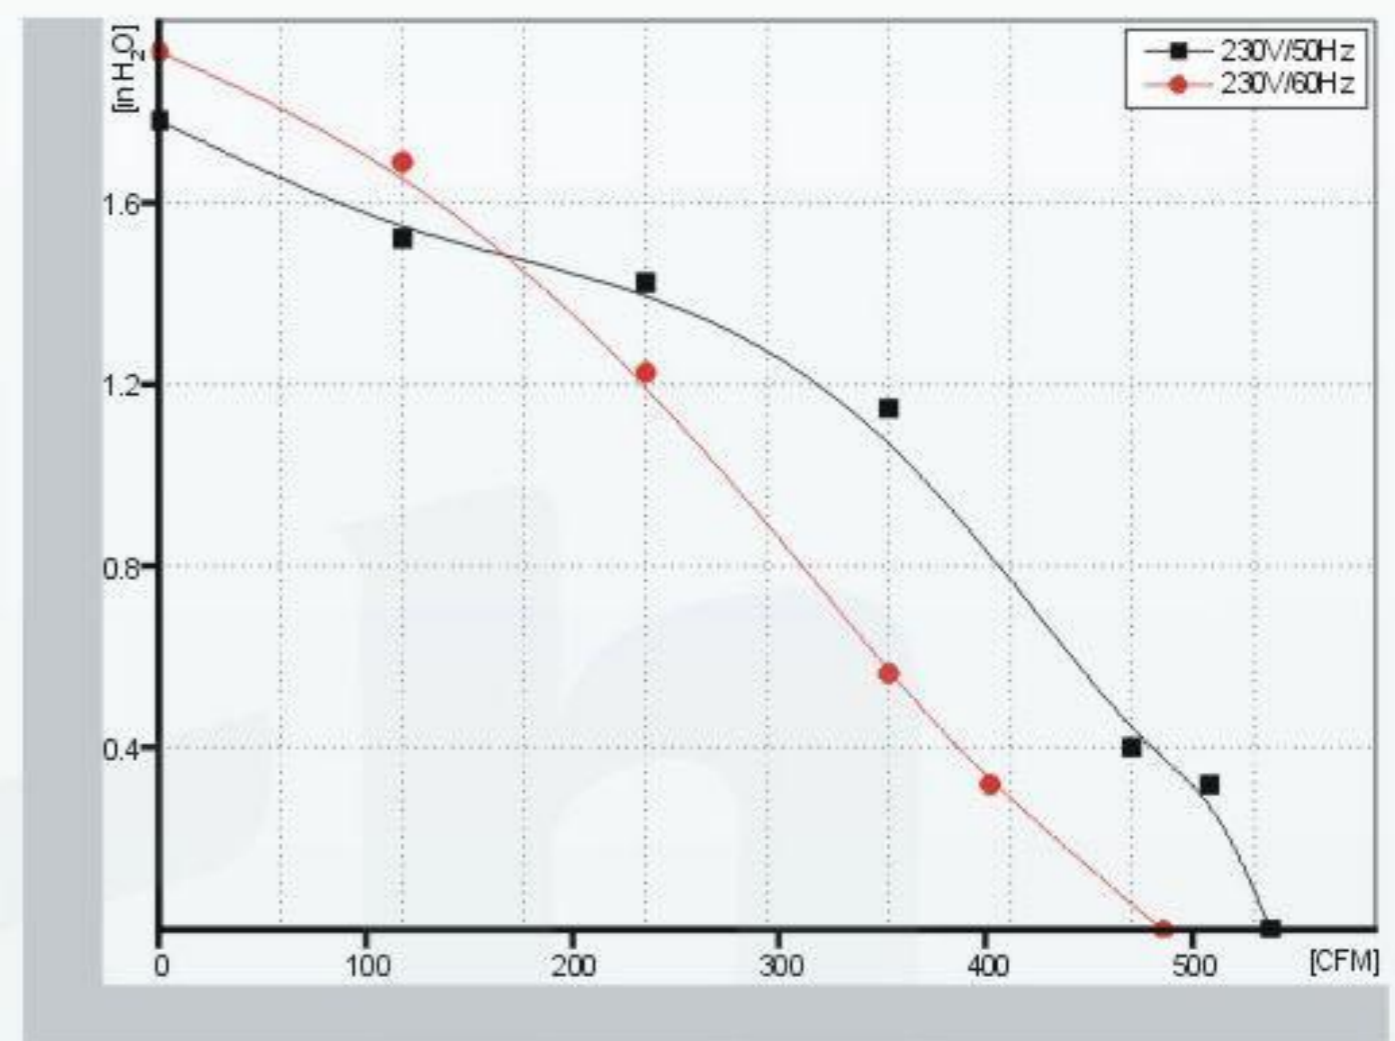

- ③ 蜗壳和风轮均采用镀锌板制成
- ③ 电机由蜗壳一侧的安装支架固定
- ③ 电机防护等级, IP44
- ③ 采用滚珠轴承
- ③ CCC, CE认证

- ③ **Material:** scroll housing and impeller made of galvanized sheet steel
- ③ **Mounting:** SAL (standard external-rotor) motor mounted via bracket
- ③ **Type of protection:** IP44
- ③ **Bearing:** ball bearings
- ③ **Approvals:** CCC, CE

Type	Motor	Voltage	Frequency	Airflow	Speed	Power	Current	Capacitor	Amb. Temp	Insulation
		VAC	Hz	m ³ /h	RPM	W	A	μF/VDB	°C	Class
FS133C	068-035-4	230	50/60	910/820	1250/1140	275/285	1.2/1.25	5/450	-25~+40	F

