

# RADIAL CHOKE INDUCTORS

COMPONENT

## PRODUCT IDENTIFICATION




**RC** □ **0608** - **331** **K**  
**A** **B** **C** **D** **E**

A : POWER INDUCTORS  
 B : U=UL TUBE P=PVC  
 TUBE B=BASE/BOBBIN  
 C : DIMENSION  
 D : INDUCTANCE  
 E : TOLERANCE

## APPLICATIONS

Notebook, Inkjet printer, Copying machine, Display monitor, Cellular phone, ADSL modem, Gaming machine, Color TV, Video tape recorder, Video camera, Microwave oven, Lighting and Car electronics.

## SHAPES & DIMENSIONS

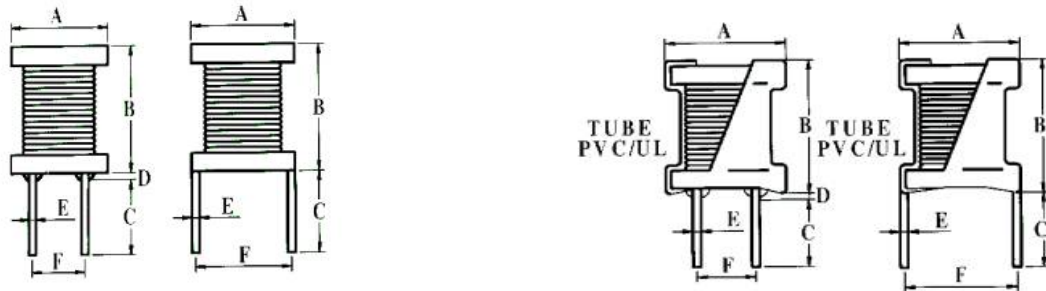

### (1) WITHOUT TUBE

UNIT IN m/m

TYPE	ØA	B	C	D	ØE	F
RC□0406	5.0(max)	7.0(max)	10.0(min)	2.0+0	0.50±0.05	2.00±0.50
RC□0608	7.0(max)	9.0(max)	10.0(min)	2.0+0	0.65±0.05	3.00±0.50
RC□0810	9.0(max)	11.0(max)	10.0(min)	2.5+0	0.65±0.05	5.00±0.50
RC□0912	10.0(max)	13.0(max)	10.0(min)	3.0+0	0.80±0.05	5.00±0.50
RC□1016	11.0(max)	17.0(max)	10.0(min)	3.0+0	0.80±0.05	6.00±0.50
RC□1415	15.0(max)	16.0(max)	10.0(min)	3.0+0	1.00±0.05	7.50±0.50

### (2) WITH PVC OR UL TUBE

UNIT IN m/m

TYPE	ØA	B	C	D	ØE	F
RC□0406	5.5(max)	7.5(max)	10.0(min)	2.0+0	0.50±0.05	2.00±0.50
RC□0608	7.5(max)	9.5(max)	10.0(min)	2.0+0	0.65±0.05	3.00±0.50
RC□0810	9.5(max)	11.5(max)	10.0(min)	2.5+0	0.65±0.05	5.00±0.50
RC□0912	10.5(max)	13.5(max)	10.0(min)	3.0+0	0.80±0.05	5.00±0.50
RC□1016	11.5(max)	17.5(max)	10.0(min)	3.0+0	0.80±0.05	6.00±0.50
RC□1415	15.5(max)	16.5(max)	10.0(min)	3.0+0	1.00±0.05	7.50±0.50

※ DESIGN AS CUSTOMER'S REQUESTED SPECIFICATIONS